
HANDSPRAY FLOW RESTRICTOR

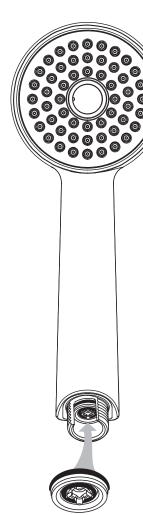

Where water conservation is an issue, a flow restrictor supplied with the fitting, which will limit the flow to 8l/min, should be inserted in the handspray inlet as shown.

Note: when this restrictor has been inserted it cannot be removed without destroying it.

If higher flow rates are required the restrictor should be left out.

0870 129 6085

01482 499611

E-MAIL UKcustcare@idealstandard.com

Armitage Shanks pursues a policy of continuing improvement in design and performance of its products.

The right is therefore reserved to vary specification without notice.


Armitage Shanks is a division of Ideal Standard (UK) Ltd

Armitage Shanks The Bathroom Works, National Avenue Kingston-upon-Hull, HU5 4HS, England

4945 04/11 B865631

ARMAGLIDE 2 SHOWER KITS INSTALLATION INSTRUCTIONS

Suitable for high pressure only (i.e. 1.0 bar minimum)

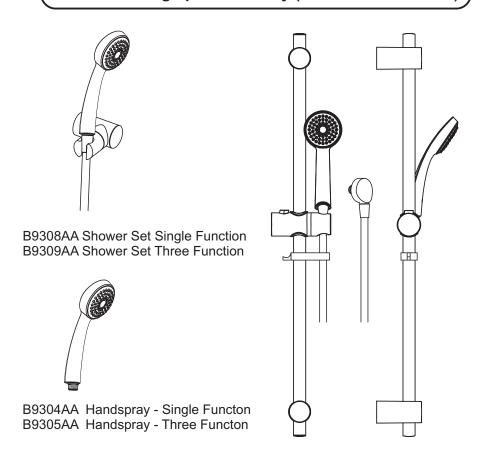

B9306AA Slidebar Shower Kit 900mm Single Function B9307AA Slidebar Shower Kit 900mm Three Function



INSTALLER:

After installation please pass this instruction booklet to the user

