


WAVERLEY

Assembly Instructions for Close Coupled, Low level and High Level Cisterns

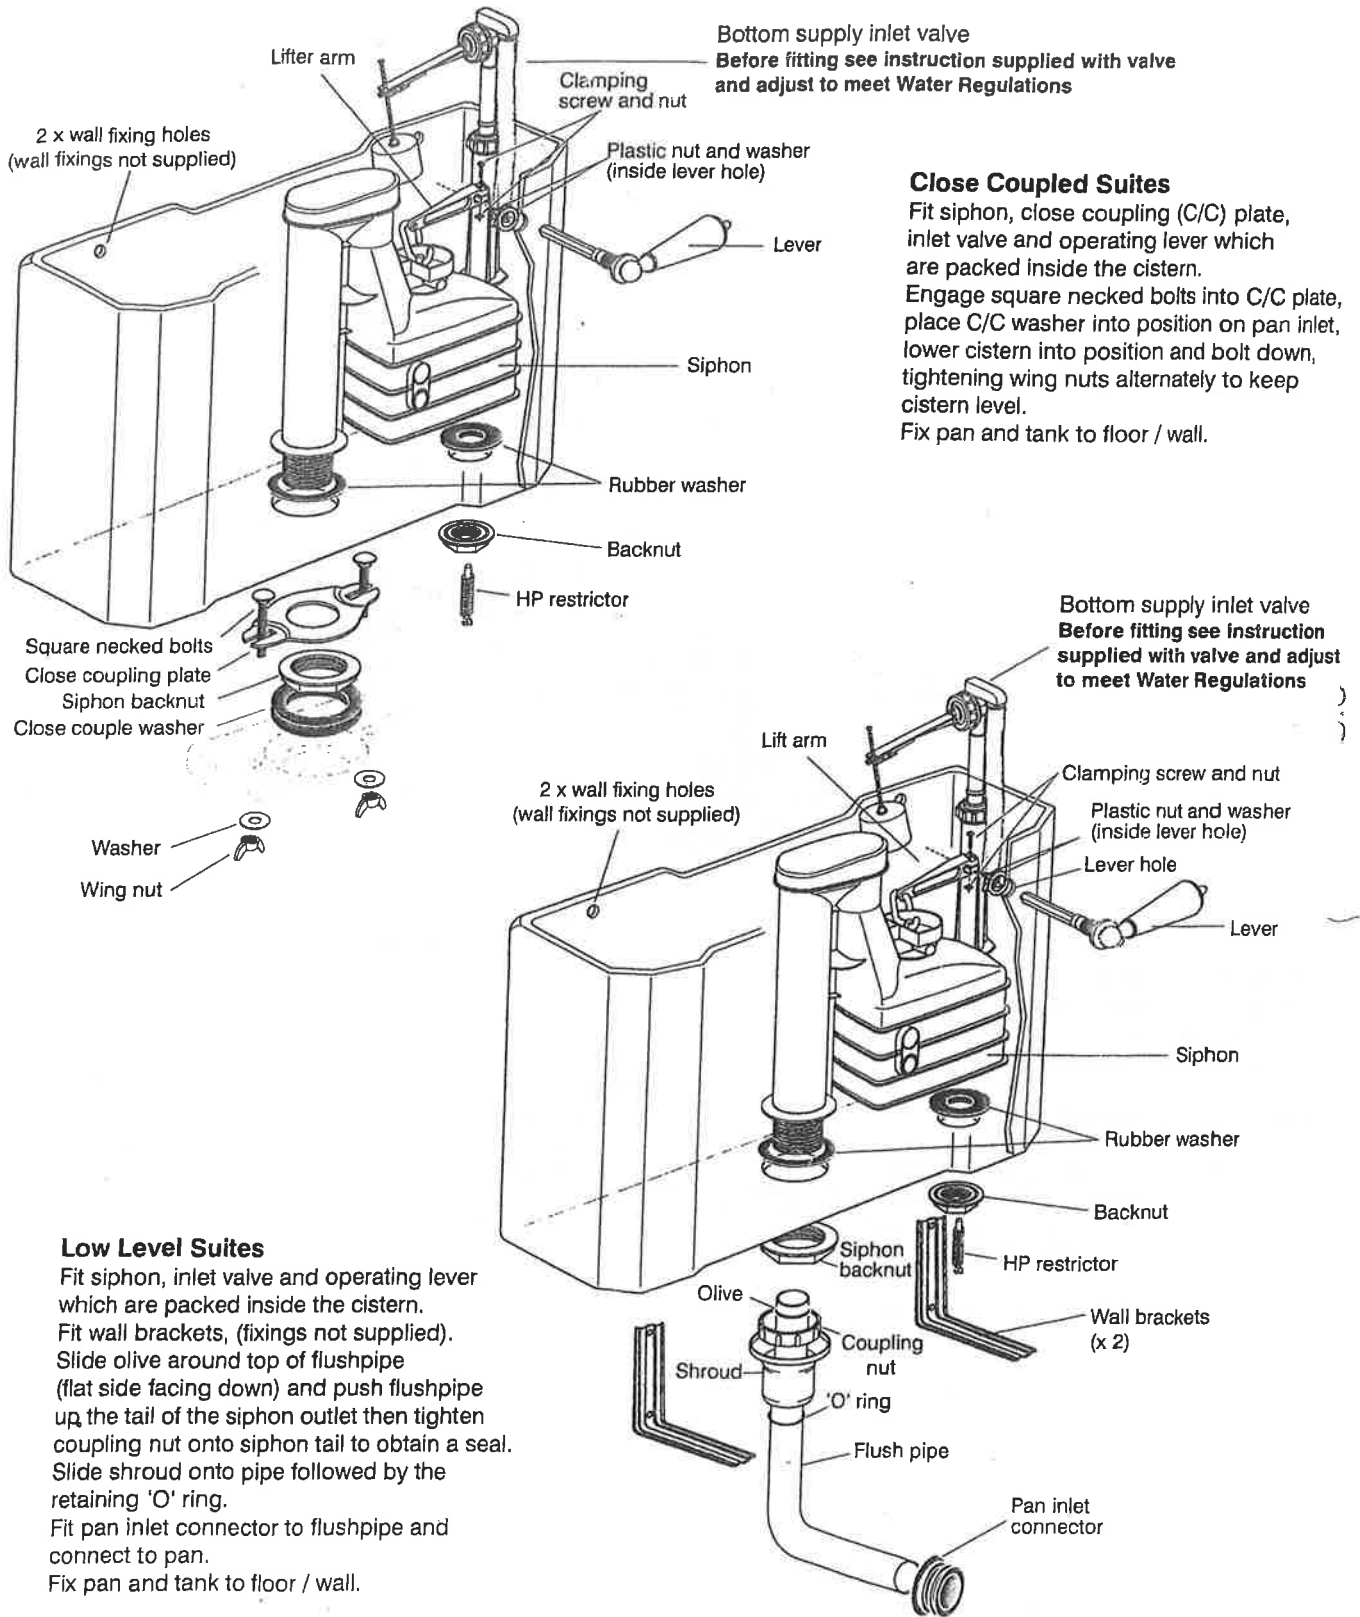

Bottom supply inlet valve
Before fitting see instruction supplied with valve
and adjust to meet Water Regulations

Close Coupled Suites

Fit siphon, close coupling (C/C) plate, inlet valve and operating lever which are packed inside the cistern. Engage square necked bolts into C/C plate, place C/C washer into position on pan inlet, lower cistern into position and bolt down, tightening wing nuts alternately to keep cistern level. Fix pan and tank to floor / wall.

Bottom supply inlet valve
Before fitting see instruction supplied with valve and adjust to meet Water Regulations

Low Level Suites

Fit siphon, inlet valve and operating lever which are packed inside the cistern. Fit wall brackets, (fixings not supplied). Slide olive around top of flushpipe (flat side facing down) and push flushpipe up the tail of the siphon outlet then tighten coupling nut onto siphon tail to obtain a seal. Slide shroud onto pipe followed by the retaining 'O' ring. Fit pan inlet connector to flushpipe and connect to pan. Fix pan and tank to floor / wall.